




ONCE WEATHERED COPINGS


TWICE WEATHERED COPINGS



Max. 215mm wide wall

CA01


Weight : 43.7kg/m

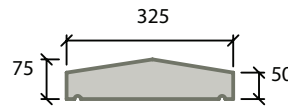

Max. 215mm wide wall

CA09


Weight : 43.7kg/m

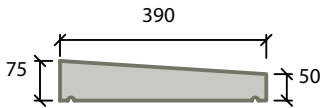

Max. 280mm wide wall

CA02


Weight : 52.4kg/m

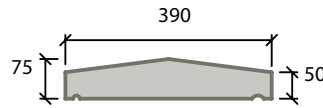

Max. 280mm wide wall

CA10


Weight : 52.4kg/m

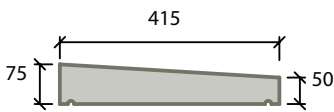

Max. 305mm wide wall

CA03


Weight : 55.8kg/m

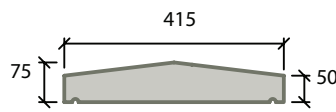

Max. 305mm wide wall

CA11


Weight : 55.8kg/m

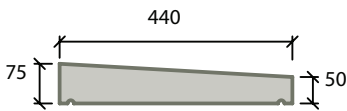

Max. 330mm wide wall

CA04


Weight : 59.1kg/m

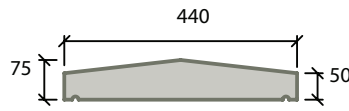

Max. 330mm wide wall

CA12


Weight : 59.1kg/m

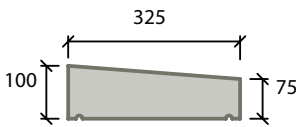

Max. 215mm wide wall

CA05


Weight : 61.1kg/m

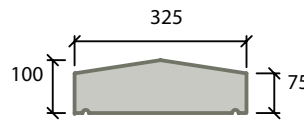

Max. 215mm wide wall

CA13


Weight : 61.1kg/m

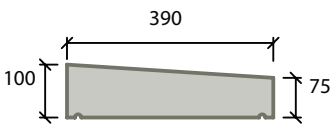

Max. 280mm wide wall

CA06


Weight : 73.4kg/m

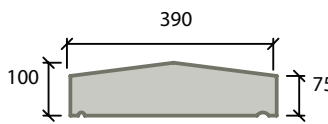

Max. 280mm wide wall

CA14


Weight : 73.4kg/m

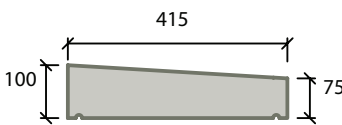

Max. 305mm wide wall

CA07


Weight : 78.1kg/m

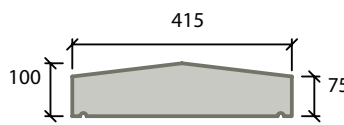

Max. 305mm wide wall

CA15


Weight : 78.1kg/m

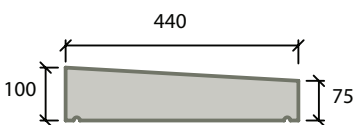

Max. 330mm wide wall

CA08

Weight : 82.8kg/m

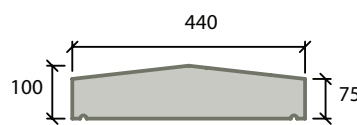

Max. 330mm wide wall

CA16

Weight : 82.8kg/m

Copings available in 665mm standard lengths (other lengths as specials).

Corners (ext - CE & int - CI) and Stop Ends (XE) available to all profiles.

If required, 2no. lifting inserts will be cast into top of unit, nominally recessed for pointing over.

NB: Min 55mm coping projection required to meet BS 5628-3 (2005).